



# ASSEMBLY AND INSTALLATION INSTRUCTIONS

W0380

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.

## Hardware Package (included):

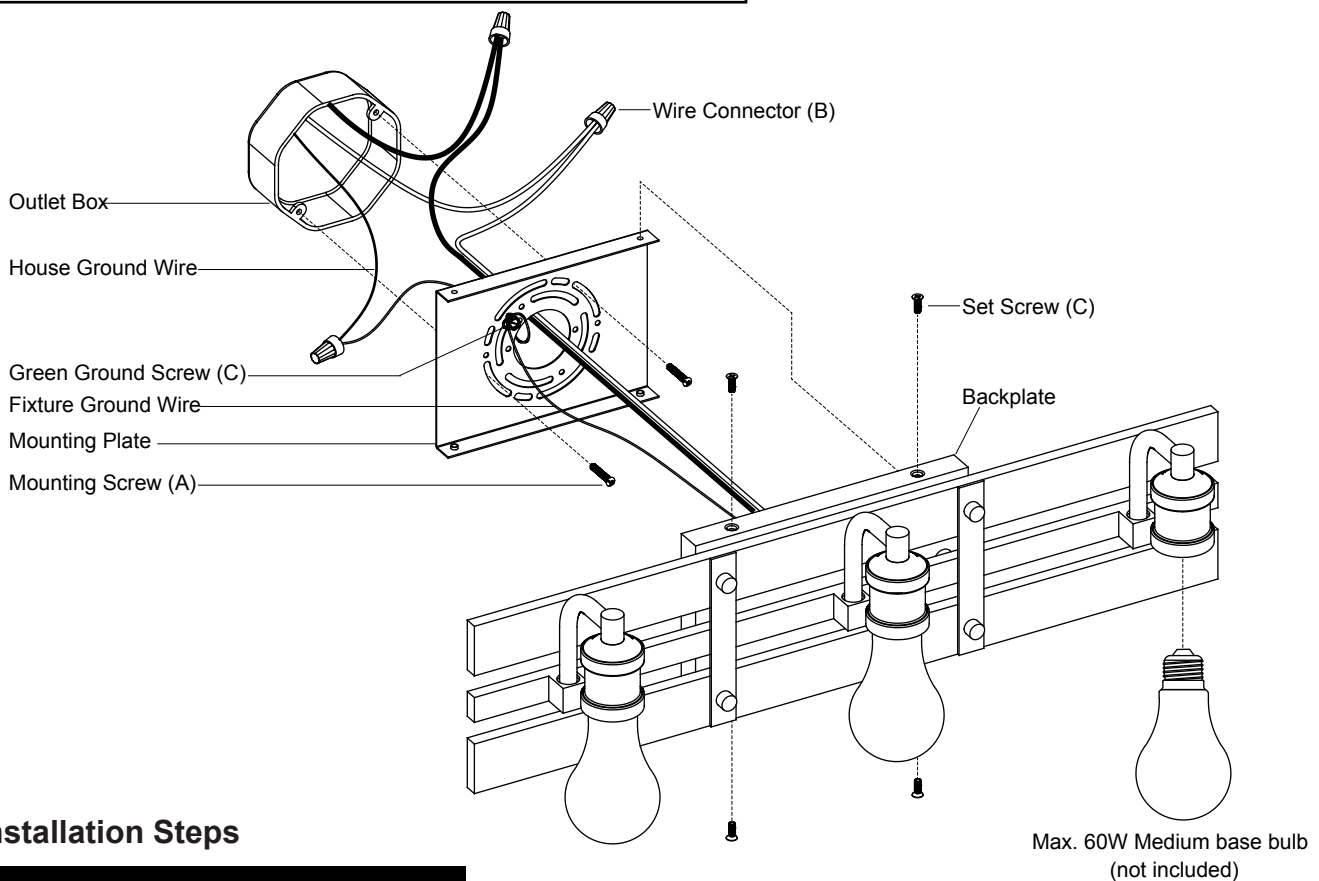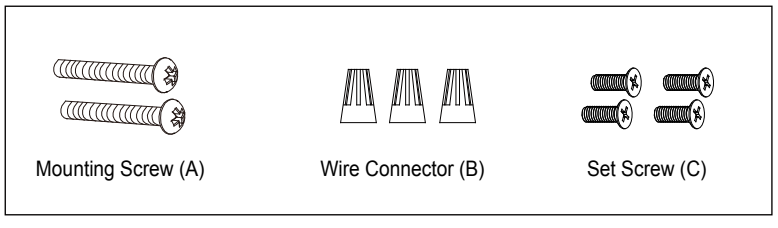

## Installation Steps

Turn off the power at fuse or circuit box.





1. Remove the mounting plate from the backplate by disassembling the set screws (C).
2. Attach mounting plate to the outlet box using two mounting screws (A).
3. Pull out the source wires from the outlet box, make wire connections using wire connectors (B) as follows:
  - Connect the hot wire (black insulation) from the fixture to the black wire from the power source.
  - Connect the neutral wire (white insulation) from the fixture to the white wire from the power source.
  - Attach the fixture ground wire (bare wire) to the mounting plate with the green ground screw , then connect it to the house ground wire with the wire connector (B).Carefully put the wires back into the outlet box.



4. Attach the backplate to the mounting plate by aligning holes, secure four set screws (C) from the holes of the backplate into the open holes of the mounting plate.
5. Install 3 X 60W medium base bulbs (not included).  
See relamping label at socket area or packaging for maximum wattage allowed.

**Turn on the power at fuse or circuit box.**

**The following parts are available for re-order if damaged or missing.**

**Spare Parts List:**

|   |   |  |  |
|---|---|--|--|
| <br>Mounting Screw (A) | <br>Wire Connector (B) | <br>Set Screw (C) |  Assembly Kit<br>6334MM (1 SET) |
|---|---|--|--|

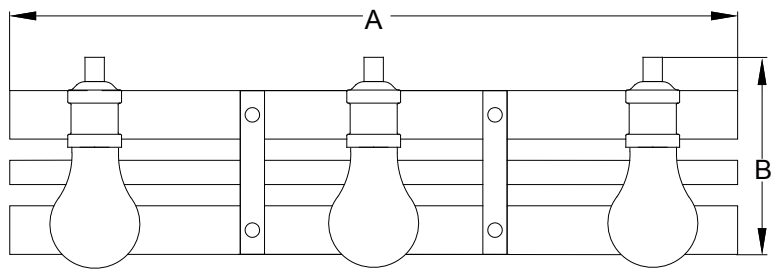

- A: 23-5/8"**
- B: 6-1/2"**
- C: 5-1/4"**